

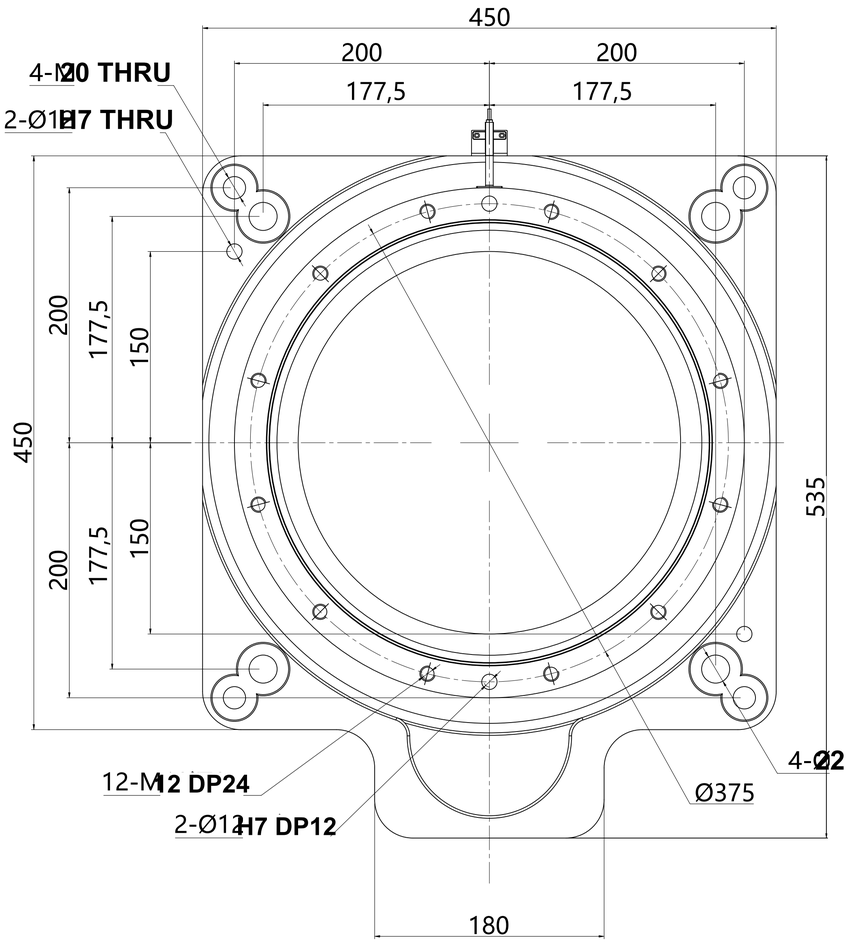


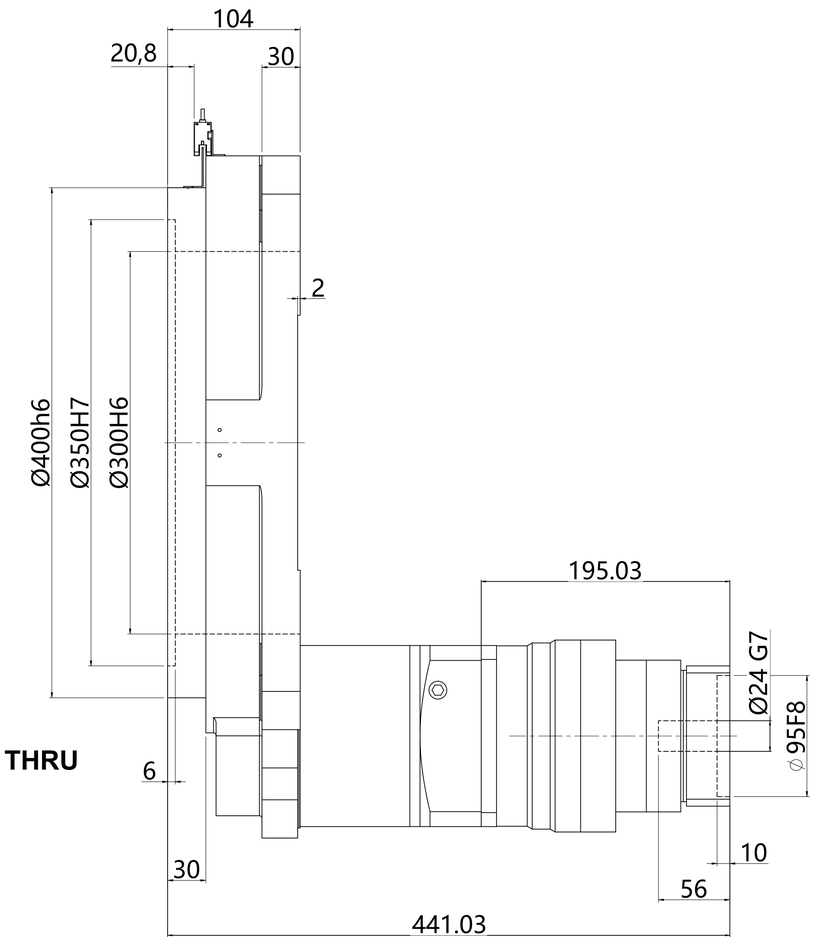

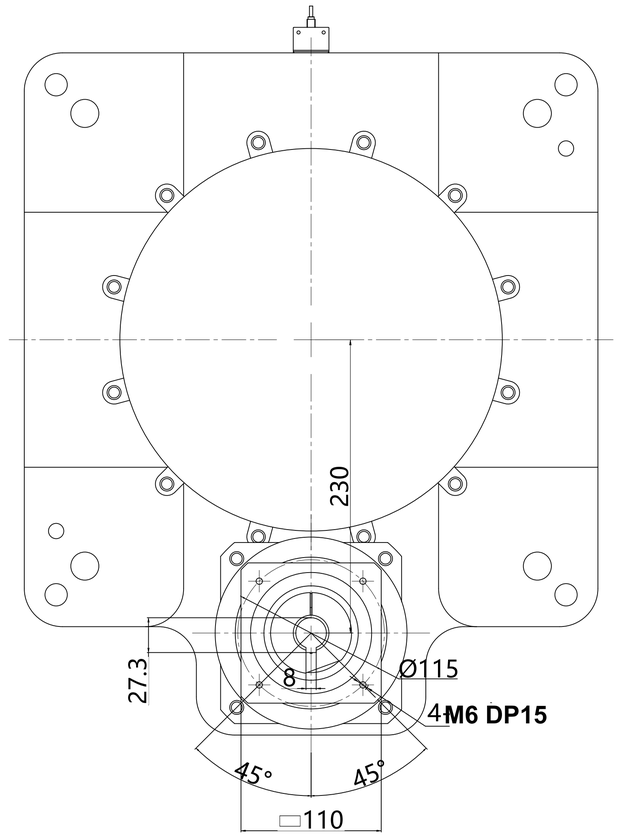

RATIO i 200 300 400 500 700 1000					
RATED TORQUE N.m	3400	MAX TORQUE N.m	3x RATED	BEARING	CROSS ROLLER
BACKLASH	ZERO BACKLASH	PROTECTION IP	50	AXIAL LOAD N	35000
TORSIONAL RIGIDITY	175	LUBRICATION	LONG TERM	INERTIA MOMENT N.m	750
ACCURACY LIFE h	30,000 INT.	EFFICIENCY %	85	TABLE SPEED rpm	200 INT.
POSITIONING arcmin	≤5	NOISE dB	≤69	CONCENTRICITY mm	≤0.02
REPEATABILITY arcsec	≤60	PARALLELISM mm	≤0.04	SERVO MOTOR W	2000-5000
MOUNTING	ANY	STEPPER MOTOR	110 STEPPER	DESIGN LOAD kg	1300
WEIGHT kg	93	TILTING MOMENT N.m	9600		

ASDR	HOLLOW ROTARY TABLE REDUCER		
MODEL	ASDR450JS-L2-24-95-115-M6-J8-K300 MATERIAL: 304 STAINLESS STEEL		
MARK QTY	ZONE	FILE NO.	SIGNATURE / DATE
DESIGN	STANDARD		STAGE
CHECKED	SCALE		WEIGHT
REVIEWED	APPROVED		SHEET 1 OF 1